




Tank Breather Filter with Filler Strainer ELF up to 5500 l/min

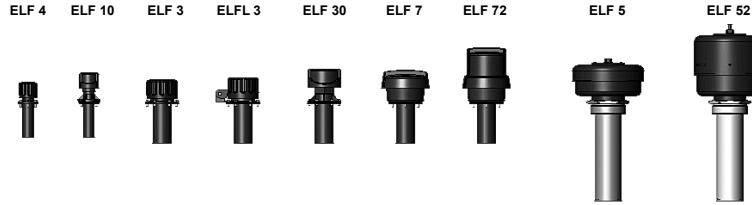

1. TECHNICAL SPECIFICATIONS

1.1 FILTER HOUSING

Construction

Tank breather filters size 4, 10, 3 and 30 consist of an air filter top, which is connected to the mounting flange by a bayonet plate or a threaded boss, and a filler strainer.

Sizes 5 and 52 consist of a two-part threaded air filter top, with built-in oil mist trap, one or two exchangeable filter element(s) and a filler strainer.

Sizes 7 and 72 consist of a two-part flanged filter top, an exchangeable filter element and a filler strainer.

1.2 FILTER ELEMENTS

Contamination retention capacities in g Paper

ELF	3 µm	10 µm
4	2.9	4.1
10	2.9	4.1
3	6.2	8.7
30	6.2	8.7
7	26.1	36.7
72	52.2	73.4
5	85.1	119.6
52	170.2	239.2

The filter elements are made from phenolic resin impregnated paper and cannot therefore be cleaned!

1.3 FILTER SPECIFICATIONS

Temperature range	-30 °C to +100 °C	
Material of housing	Steel, zinc-plated/plastic coated (ELF 4, 3), steel (ELF 5, 52) glass fibre reinforced synthetic material (ELF 10, 30, 7, 72)	
Material of filler strainer	Synth. material: ELF 10, 4, 30, 3, 7, 72 Metal: ELF 5, 52	
Type of clogging indicator	VMF (return line indicator)	
Pressure setting of clogging indicator	0.6 bar 0.035 bar	K pressure gauge UBM indicator (others on request)

1.4 SEALS

NBR (= Perbunan) on filter
NBR/polyurethane on element
Cardboard on mounting flange

1.5 SPECIAL MODELS AND ACCESSORIES

- lockable model (only ELFL 3)
- with check/bypass valve to support the suction characteristics of the pump Not 100% air-tight or leakage-free! (only ELF 10, 3, 30, 5 and 52)
- with anti-splash device (only ELF 10, 3, 30, 7, 72)
- with connection for a clogging indicator (only ELF 7, 72)
- with filler adaptor for automotive applications (only ELF 7 and 72) - see point 5.

1.6 SPARE PARTS

See Original Spare Parts List

1.7 CERTIFICATES AND APPROVALS

On request

1.8 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

The standard models are suitable for use with mineral and lubrication oils. For non-flam and biodegradable oils, see tables:

Non-flam fluids

ELF	HFA	HFC	HFD-R
4, 10, 3, 30	-	-	-
7, 72, 5, 52	●	●	-

- HFA oil in water emulsion (H₂O content ≥ 80%)
- HFC water polyglycol solution (H₂O content 35-55%)
- HFD-R synthetic, water free phosphate ester

Biodegradable fluids

ELF	HTG	HE	HPG	PRG
all sizes	+	+	●	●

+ suitable for all

● contact our Technical Sales Department


- not suitable

- HTG vegetable oil based hydraulic fluids
- HE ester-based synthetic hydraulic fluids
- HPG polyglycol-based synthetic hydraulic fluids
- PAG sub-group HPG: polyalkalene glycol
- PEG sub-group HPG: polyethylene glycol

1.9 CHANGING INTERVALS

The breather filter elements or filters must be replaced as frequently as the fluid filters, but at least once a year.

Symbol

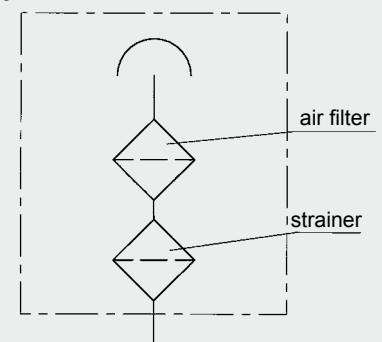

2. MODEL CODE (also order example)

2.1 COMPLETE FILTER

2.1.1 ELF 4, 10, 3, 30 and ELFL 3

ELF P 30 F 3 W 1 . X /-RV0.4

Filter type _____
 ELF
 ELFL (lockable)

Filter material _____
 P Paper

Size _____
 ELF 4, 10, 3, 30
 ELFL 3

Type and size of connection _____

	Filter size			
	4	10	3	30
F = Flange	●	●	●	●

Filtration rating in µm _____
 P 3 (absolute)

Type of clogging indicator _____
 W no port for clogging indicator

Type code _____

Size	Code	Δp [bar]
ELF 4	1.X	-
ELF 10	1.X	-
ELF 3	1.X	-
ELF 3.../-RV	4.X	0.4
ELF 3.../-RV	5.X	0.7
ELF 3.../-RV	6.X	0.2
ELF 3.../-RV	7.X	1.0
ELF 30	1.X	-

Modification number _____
 X the latest version is always supplied

Supplementary details

AS anti-splash without check/bypass valve (not ELF 3 & 4)
 RV check/bypass valve (not ELF 4)
 RV0.2 } valve with relevant cracking pressure
 RV0.4 } (only ELF 10 and 30)
 RV0.7 }
 SO148 metal filler strainer, 200 mm long (only ELF 3 and 30)
 SO175 metal filler strainer, 100 mm long (only ELF 3 and 30)

2.1.2 ELF 7 and 72

ELF P 72 F 3 W 1 . X /-SO148

Filter type _____
 ELF

Filter material _____
 P Paper

Size _____
 ELF 7, 72

Type and size of connection _____

	Filter size	
	7	72
F = Flange DIN 24557/Pt2	●	●

Filtration rating in µm _____
 P 3 (absolute)

Type of clogging indicator _____
 W no port for clogging indicator
 K pressure gauge (measuring range: -1 to +0.6 bar)
 UBM visual/analogue vacuum gauge with manual reset (pressure setting: -0.035 bar)

Type code _____
 0 for type UBM
 1 for types W and K

Modification number _____
 X the latest version is always supplied

Supplementary details _____
 AS anti-splash (only ELF 7, 72 without check/bypass valve)
 SO148 metal filler strainer, 200 mm long
 SO175 metal filler strainer, 100 mm long
 SO394 ELF filter without strainer

2.1.3 ELF 5 and 52

ELF P 52 G 3 W 2 . X /-RV0.4

Filter type _____
 ELF

Filter material _____
 P Paper
 BN Betamicron®

Size _____
 ELF 5, 52

Type and size of connection _____

	Filter size	
	5	52
G = Thread	G1 1/2	● ●
	G2	● ●
	G2 1/2	● ●
	G3	● ●

Filtration rating in µm _____
 P 3 (absolute)
 BN 3 (absolute)

Type of clogging indicator _____
 W no port for clogging indicator

Type code _____

Code	Connection
2.X	G 2½
3.X	G 3
4.X	G 2
5.X	G 1½

Modification number _____
 X the latest version is always supplied

Supplementary details

RV0.4 check/bypass valve with 0.4 bar pressure setting

2.2 REPLACEMENT ELEMENT

0005 L 003 P

Size _____
 0005 for ELF 5, 52
 0007 for ELF 7
 0072 for ELF 72

Type _____
 L

Filtration rating in µm _____
 P 003
 BN 003 (only for 0005)

Filter material _____
 P Paper
 BN Betamicron®

Replacement elements cannot be ordered for ELF 4, 10, 3, 30 and ELFL 3. These filters are only available complete !

2.3 REPLACEMENT CLOGGING INDICATOR

VMF 0.6 K . X

Type _____
 VMF Return line indicator

Pressure setting _____
 0.6 -1 to +0.6 bar
 0.035 -0.035 bar

Type _____
 (see point 2.1)

Modification number _____
 X the latest version is always supplied

3. FILTER CALCULATION / SIZING

3.1 SINGLE PASS FILTRATION PERFORMANCE DATA FOR AIR FILTER ELEMENTS

The following separation values were established under real-life simulated conditions. This means that the selected velocity of the flow against the filter mesh was 20 cm/s and the contamination added was 40 mg/m³ of ISO MTD test dust.

Filtration rating	Retention value d..	For particle size	Filter material
3 µm	d 80	0.74 µm	Paper
	d 100	2.64 µm	
10 µm	d 80	1.49 µm	BN
	d 100	9.56 µm	
10 µm	d 80	0.25 µm	BN
	d 100	0.84 µm	

The d 80 value refers to the particle size which is filtered out at a rate of 80% during the retention test. The particle size determined by this method is called the nominal filtration rating of the air filter. The d 100 value therefore refers to the particle size which is filtered out at a rate of 100% during the single-pass test. The particle size determined by this method is called the absolute filtration rating of the air filter.

Table of average dust concentrations in real life:

Urban regions with a low level of industry	3-7 mg/m ³ air
General mechanical engineering	9-23 mg/m ³ air
Construction industry (wheeled vehicles)	8-35 mg/m ³ air
Construction industry (tracked vehicles)	35-100 mg/m ³ air
Heavy industry	50-70 mg/m ³ air

3.2 DIFFERENTIAL PRESSURE ACROSS BREATHER FILTER

The differential pressure (with clean element) for the various filter sizes is shown in the graphs under point 3.4.

3.3 SIZING GUIDELINES

For ease of calculation, our Filter Sizing Program is available on request free of charge.

NEW: Sizing online at www.hydac.com
The rate at which contamination enters a hydraulic system can be considerably reduced by using efficient tank breather filtration.

NOTE:

Incorrectly sized breather filters can place additional strain on the system and reduce the service life of hydraulic filter elements.


For optimum sizing the following should therefore be observed:

- Filtration rating of air breather filter ≤ filtration rating of hydraulic filter
- Only use air breather filters with an absolute retention rate (d100 ≤ x µm; x = given filtration rating)
- Max. permissible initial pressure loss: 0.01 bar (with a clean filter element and calculated air flow rate)
- Determination of the calculated air flow rate:
 $QA = f5 \times Qp$
 QA = air flow rate for sizing purposes in l_N/min
 f5 = factor for operating conditions
 Qp = max. flow rate of the hydraulic pump in l/min


Ambient conditions	Factor f5
Low dust concentration; filter fitted with clogging indicator; continuous monitoring of the filter	1-2
Average dust concentration; filter without clogging indicator; intermittent monitoring of the filter	3-6
High dust concentration; filter without clogging indicator; infrequent or no monitoring of the filter	7-10

3.4 AIR FLOW RATE


ELF 4

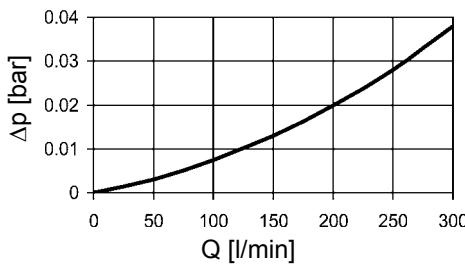


ELF 10

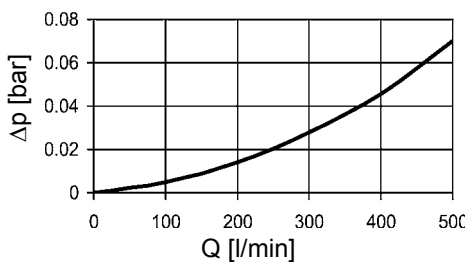


ELF 3

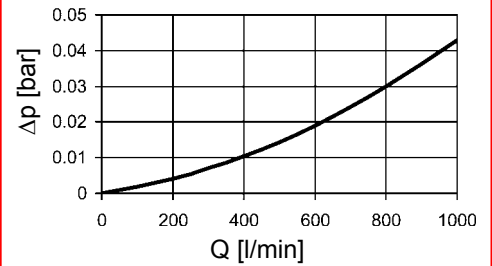


ELF 30

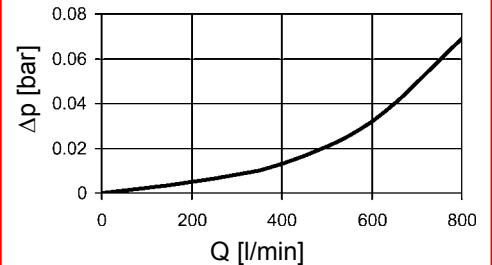


ELF 7

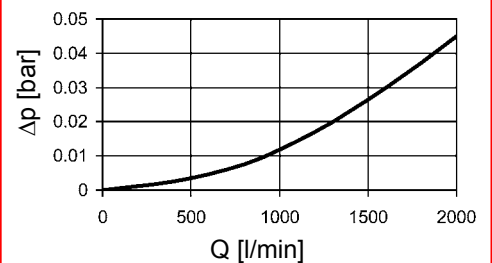


ELF 72

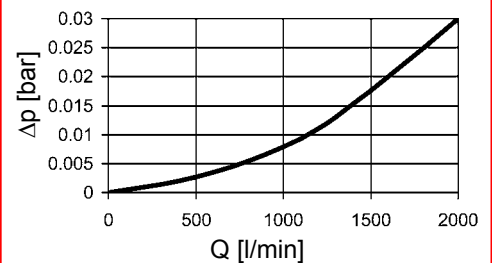

ELF 5

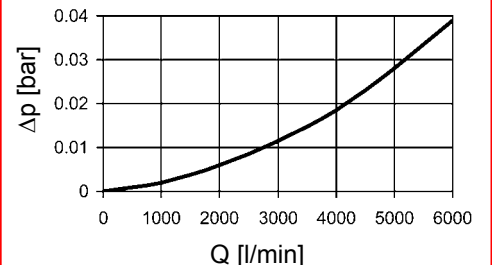


ELF 52

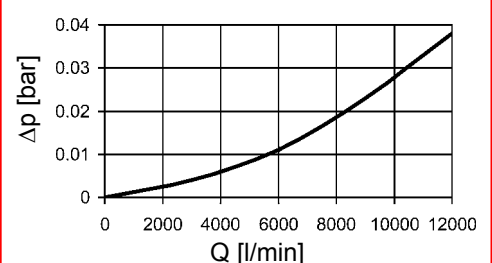


4. DIMENSIONS

ELF 4

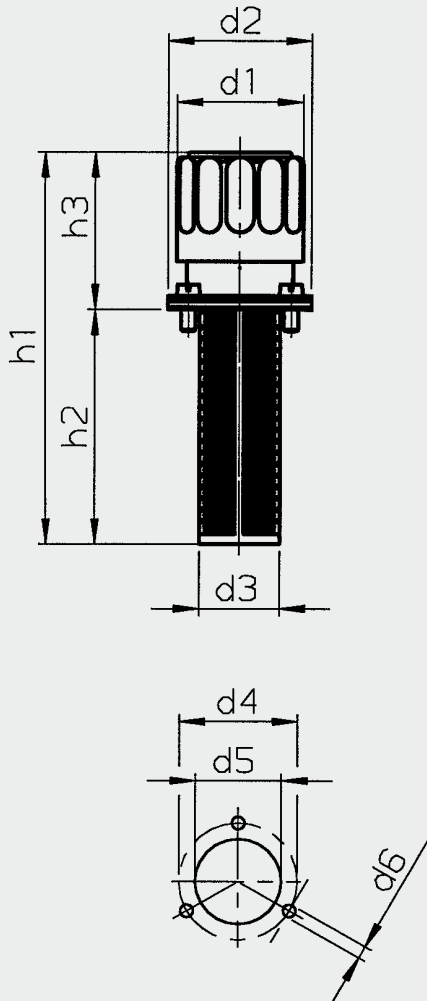


	ELF 4...
d1	44
d2	50
d3	28
d4	41.3
d5	30
d6	4.5
h1	135
h2	81.5
h3	53.5
Weight	0.20 kg

ELF 10


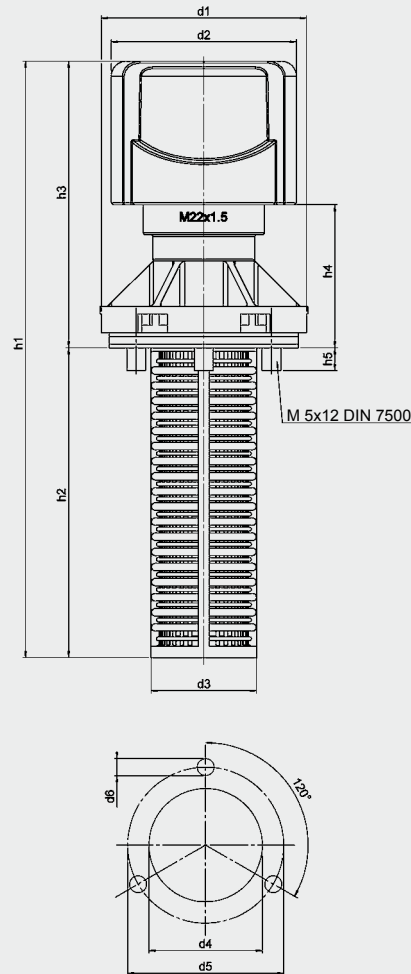


	ELF 10...
d1	54
d2	49
d3	28
d4	30
d5	41.3
d6	4.5
h1	158
h2	82
h3	76
h4	38
h5	6
Weight	0.08 kg

ELF 3

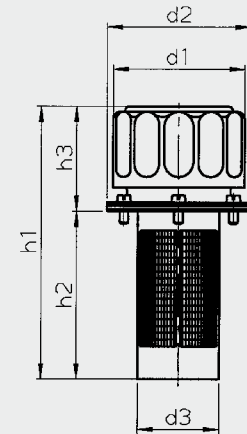


ELFL 3

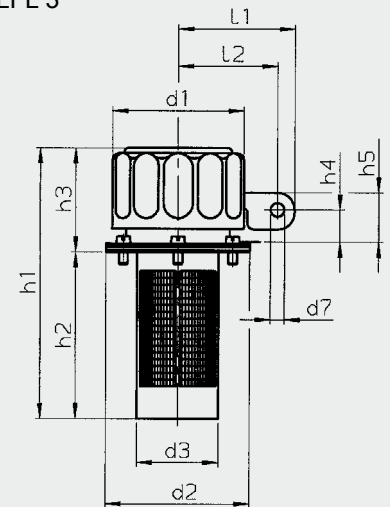

Interface DIN 24557/Part 2

	ELF 3.../ELFL 3...
d1	76
d2	83
d3	49
d4	73
d5	60
d6	4.5
d7	8
h1	159
h2	96.5
h3	61.5
h4	21
h5	31
L1	67.5
L2	57.5
Weight	0.25 kg


ELF 30

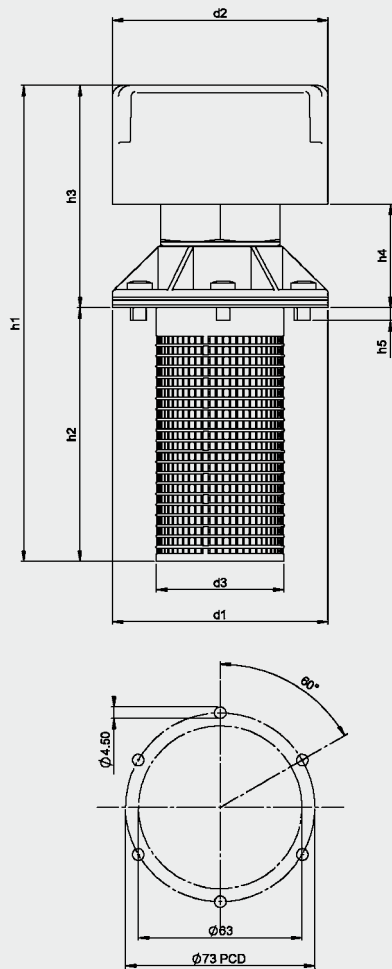

Interface to DIN 24557/Part 2

	ELF 30...
d1	83
d2	83
d3	49
h1	185
h2	100
h3	85
h4	40
h5	5
Weight	0.23 kg


ELF 7

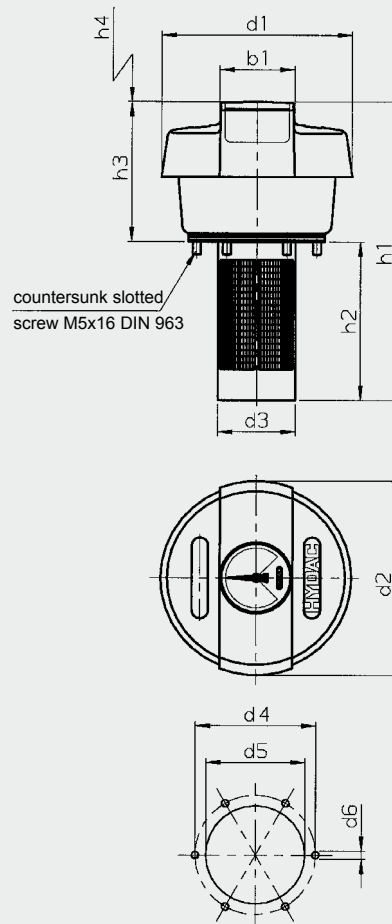

Interface to DIN 24557/Part 2

	ELF 7...
d1	116
d2	120
d3	47
d4	73
d5	60
d6	M5
h1	181
h2	97
h3	84
h4	60
b1	44
Weight	0.38 kg


ELF 72

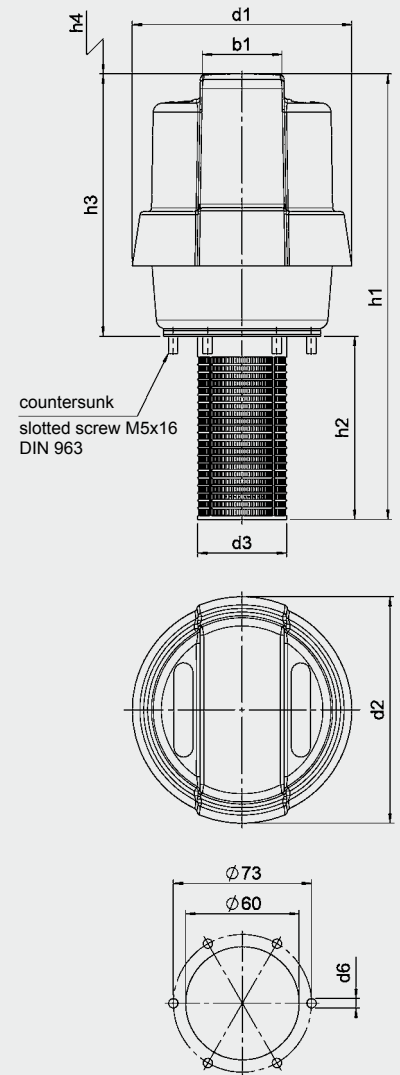


Interface to DIN 24557/Part 2

	ELF 72...
d1	116
d2	120
d3	47
d6	M5
h1	236
h2	97
h3	139
h4	60
b1	44
Weight	0.58 kg

ELF 5

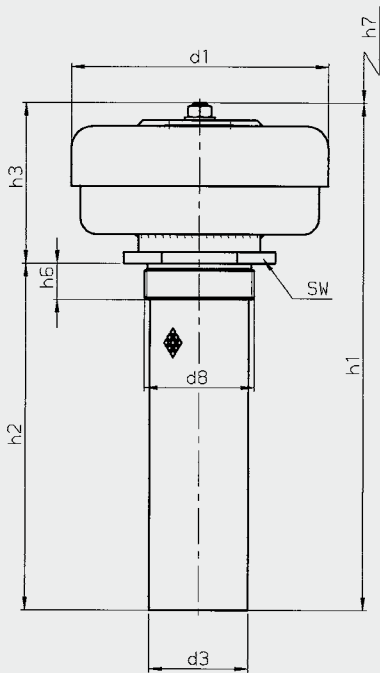

ELF 52

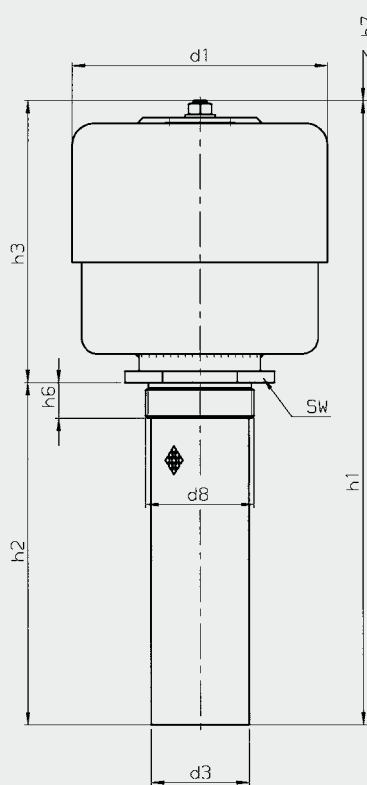

	ELF 5...	ELF 5... /-RV
d1	177	
d3	68	
d8	...2.X	G 2½
	...3.X	G 3
	...4.X	G 2
	...5.X	G 1½
h1	350	360
h2	240	
h3	105	126
h6	25	
h7	90	
SW	90	
Weight	...2.X	2.70 kg
	...3.X	3.10 kg
	...4.X	2.70 kg
	...5.X	2.60 kg

	ELF 52...	ELF 52... /-RV
d1	177	
d3	68	
d8	...2.X	G 2½
	...3.X	G 3
	...4.X	G 2
	...5.X	G 1½
h1	416	438
h2	240	
h3	176	198
h6	25	
h7	125	112
SW	90	
Weight	...2.X	3.10 kg
	...3.X	3.50 kg
	...4.X	3.10 kg
	...5.X	3.00 kg

NOTE


The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

5. FILLER ADAPTOR

This adaptor can only be used on ELF 7 and ELF 72 filters!

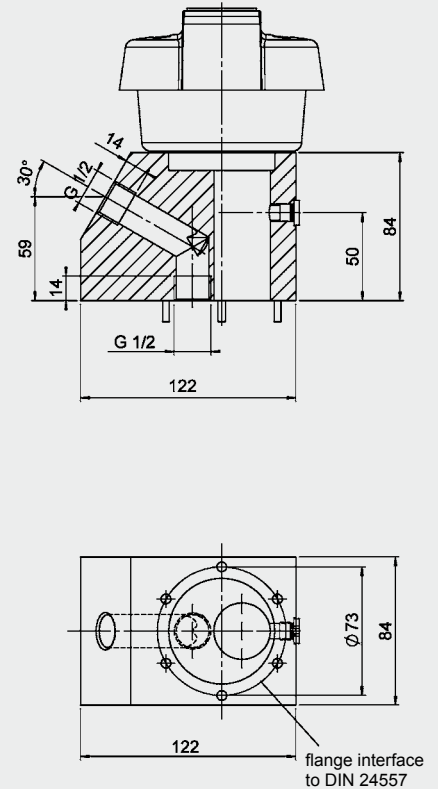

These filler adaptors are available in the following threaded connections:

- Adaptor ELF /-FA12 (G ½)
(Part No.: 03100932)
- Adaptor ELF /-FA34 (G ¾)
(Part No.: 03100933)
- Adaptor ELF /-FA1 (G 1)
(Part No.: 03100931)

HYDAC Filbertechnik GmbH
 Industriegebiet
D-66280 Sulzbach/Saar
 Tel.: 0 68 97 / 509-01
 Fax: 0 68 97 / 509-300
 Internet: www.hydac.com
 E-Mail: filter@hydac.com